

Gaskleen® V Series Filter Assembly

Description

The Gaskleen V filter assembly is Pall's latest generation gas filter assembly, designed to provide filtration of ultrahigh-purity semiconductor process gases. Our patented o-ringless design eliminates the need for an elastomeric seal. As a result, there are no downstream (wetted surface) welds.

The preconditioned option provides the cleanest PTFE filter assemblies available.

- 316L stainless steel housing
- All-fluoropolymer filter element
- High temperature and pressure resistance
- 100% helium leak tested
- Manufactured and packaged in a cleanroom environment



Specifications

Materials	<ul style="list-style-type: none"> • Medium: PTFE • Support: fluoropolymer • Core and end caps: PFA • O-ring: None • Electropolished 316L stainless steel housing • VAR PLUS housing meets or exceeds typical VIM / VAR specification • Internal Surface Finish <ul style="list-style-type: none"> ≤ 0.18 μm / 7 μin R_a (gasket-seal fittings) ≤ 0.51 μm / 20 μin R_a (compression fittings) • Cr: Fe (≥ 1.2:1) chromium enriched internal surface chemistry
Removal Rating¹	<ul style="list-style-type: none"> • ≥ 3 nm
Preconditioned Cleanliness Option	<ul style="list-style-type: none"> • < 10 ppb moisture contribution • < 10 ppb total hydrocarbon (THC) contribution • < 10 ppb oxygen (O₂) contribution
Connections	<ul style="list-style-type: none"> • 1/4", 1/2" or 3/4" Gasket seal (VCR² or compatible) • 1/4", 3/8" or 1/2" compression fittings

Operating Conditions

- Maximum operating pressure: 5.2 MPa at 140 °C / 750 psig at 284 °F
- Maximum allowable forward differential pressure: 0.7 MPa at 20 °C / 100 psid at 68 °F
- Maximum allowable reverse differential pressure: 0.34 MPa at 20 °C / 50 psid at 68 °F
- EU Pressure Equipment Directive: Assemblies have been evaluated for compliance with the European Union's Pressure Equipment Directive 97/23/EC and are CE marked


Leak Rating

- 100% helium leak tested to 10⁻⁹ atm·cm³/s
- Design validated to 10⁻¹¹ atm·cm³/s


¹ Particle rating is based on laboratory testing with NaCl aerosol.

² VCR is a trademark of Swagelok Company.


Pressure Drop vs. Gas Flow Rate

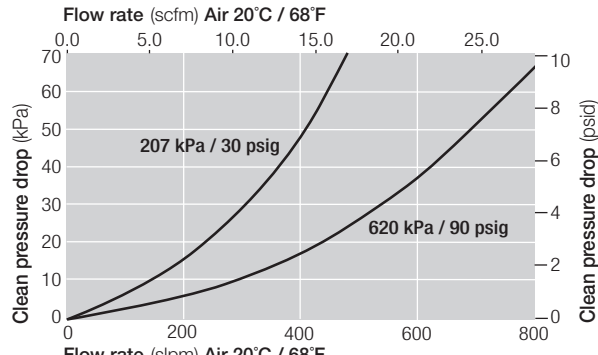

VMM4

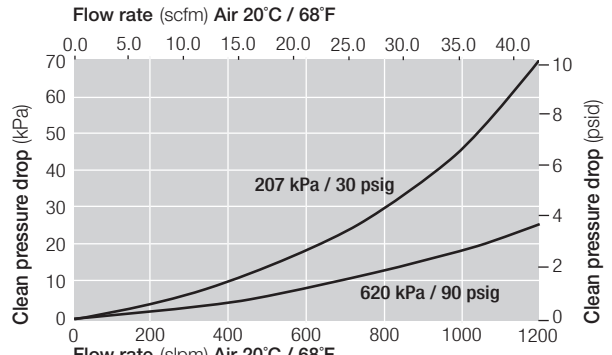


VMM8 / VMM12

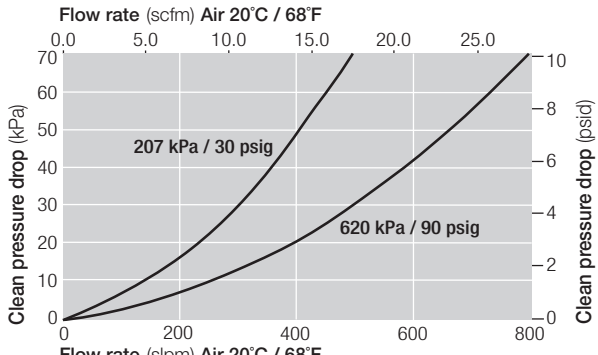

SM6

Dimensions

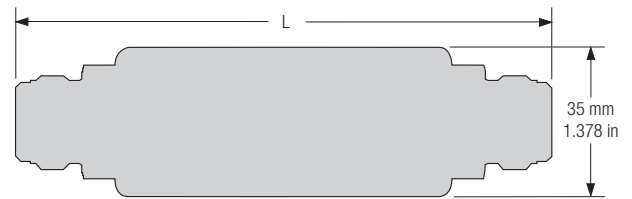

Unit conversion: 100 kilopascals = 1 bar

Part Numbers / Ordering Information

Part Number	Description	Nominal Length (L) (mm / inch)	Preconditioned
SGLFPF6501VMM4	1/4 " Gasket seal, (VCR or compatible) male / male	127 / 5.0	No
SGLFPF6502VMM4	1/4 " Gasket seal, (VCR or compatible) male / male	127 / 5.0	Yes
SGLFPF6501VMM8	1/2 " Gasket seal, (VCR or compatible) male / male	127 / 5.0	No
SGLFPF6502VMM8	1/2 " Gasket seal, (VCR or compatible) male / male	127 / 5.0	Yes
SGLFPF6501VMM12	3/4 " Gasket seal, (VCR or compatible) male / male	140 / 5.5	No
GLFPF6501VMF4	1/4 " Gasket seal, (VCR or compatible) male / female	141 / 5.6	No
SGLFPF6501SM4	1/4 " Compression seal, (Swagelok ³ or compatible) male / male	113 / 4.4	No
GLFPF6501SM4	1/4 " Compression seal, (Swagelok or compatible) male / male	141 / 5.6	No
SGLFPF6501SM6	3/8 " Compression seal, (Swagelok or compatible) male / male	118 / 4.6	No
GLFPF6501SM6	3/8 " Compression seal, (Swagelok or compatible) male / male	148 / 5.8	No
SGLFPF6501SM8	1/2 " Compression seal, (Swagelok or compatible) male / male	119 / 4.7	No

³Swagelok is a trademark of Swagelok Co.



Pall Corporation

Microelectronics

25 Harbor Park Drive
 Port Washington, NY 11050
 +1 800 360 7255 toll free US
 +1 516 484 3600 telephone
 +1 516 801 9700 fax
 Microelectronics@pall.com

Nihon Pall Ltd.

6-5-1, Nishishinjuku,
 Shinjuku-ku
 Tokyo 163-1325 Japan
 +81 3 6901 5700 telephone
 +81 3 5322 2109 fax

Visit us on the Web at www.pall.com/micro

Pall Corporation has offices and plants throughout the world. For Pall representatives in your area, please go to www.pall.com/corporate_contact.asp.

Because of technological developments related to the products, systems, and/or services described herein, the data and procedures are subject to change without notice. Please consult your Pall representative or visit www.pall.com to verify that this information remains valid.

Products in this document may be covered by one or more of the following patent numbers: US5543047; US5690765; US6113784; US7083564; US7318800; EP0982061; EP0667800; EP1380331.

© Copyright 2017, Pall Corporation. Pall, is trademarks of Pall Corporation. ® indicates a trademark registered in the USA. **Filtration. Separation. Solution.** is a service mark of Pall Corporation.